

**Meteorology 5344, Fall 2007**  
**Computational Fluid Dynamics**

**Computer Problem #5: Linear Advection Problem**  
**Distributed: Thursday, October 25, 2007**  
**Due: Tuesday, November 13, 2007**

Consider the 1-D linear convection equation

$$\frac{\partial u}{\partial t} + c \frac{\partial u}{\partial x} = 0$$

where  $c$  is a positive and constant advection speed. This equation can be solved numerically using the two-step MacCormack method:

Predictor:  $(u_i^{n+1})^* = u_i^n - c\Delta t \frac{u_{i+1}^n - u_i^n}{\Delta x}$

Corrector:  $u_i^{n+1} = \frac{1}{2} \left[ u_i^n + (u_i^{n+1})^* - c\Delta t \frac{(u_i^{n+1})^* - (u_{i-1}^{n+1})^*}{\Delta x} \right]$

- a. Derive the modified equation for this two-step scheme and determine the anticipated error type (dispersive or dissipative). When trying to eliminate ( ), make sure you use of FDE not PDE.
- b. Use the von Neumann technique to assess the stability of this scheme, and plot the phase and amplitude errors as a function of  $k\Delta x$  for several Courant numbers, including a few for which linear stability is violated.
- c. Write a computer code for this scheme, using as initial conditions the following function:

$$u(x, t = 0) = 2 + u_0(x) \left[ 1 + 0.3 \sin\left(\frac{2\pi x}{9\Delta x}\right) \right] \left[ 1 + 0.4 \sin\left(\frac{2\pi x}{10\Delta x}\right) \right]$$


where

$$u_0(x) = \begin{cases} -1 & \text{if } 8 \leq x \leq 28 \\ 1 & \text{if } 28 < x \leq 39 \\ 0 & \text{otherwise} \end{cases}$$

with  $\Delta x = 1.0$  in a periodic domain of length 50. This somewhat unconventional initial condition provides a stringent test of advective schemes because it contains sharp gradients and other spatial irregularities.

The periodic boundary condition means that  $u(x=0) = u(x=L)$ ,  $u(x=-l) = u(x=(L-l))$  and  $u(x=l) = u(x=(L+l))$ , where  $L$  is the length of the physical domain.

To facilitate the implementation of periodic conditions at the lateral boundaries, we usually define an extra grid point outside each physical boundary, so for a physical domain of length  $L$ , we need  $n_x = L/\Delta x + 3$  number of grid points, as illustrated below:

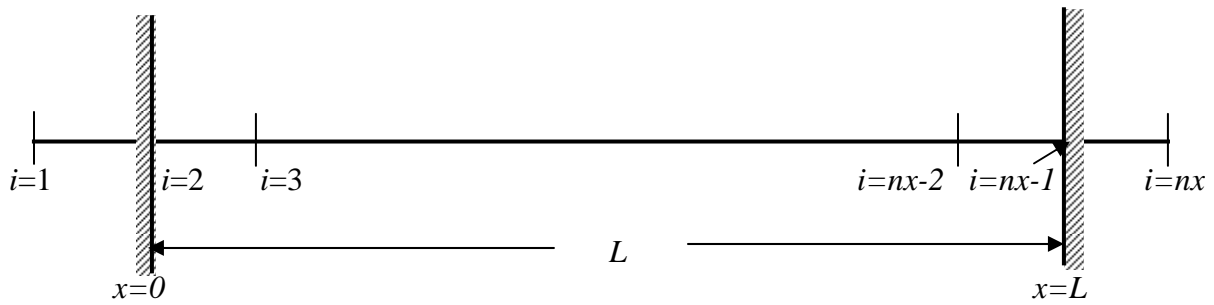

In the discrete form, the boundary conditions are:  $u(1) = u(nx-2)$  and  $u(nx) = u(3)$ . When these conditions are used,  $u(2) = u(nx-1)$  should be automatically satisfied (note a typo with the previous version of this formula). For actual implementation, you integrate the finite difference equation forward in time for  $i = 2$  to  $nx-1$ , and set boundary conditions at  $i = 1$  and  $nx$ .

Assume  $c = 1.0$ , run your code with Courant numbers of 0.10, 0.25, 0.50, and 1.00, show the plots for the numerical solutions at time  $t = 50.0, 100.0, 200.0$ , and 400.0, and discuss your results in light of what you know about this scheme based on the amplitude and phase error analyses. Is there anything special about solution with Courant number = 1?

- d. For Courant numbers of 0.10, 0.25, 0.50, and 1.00 and for  $t = 50.0, 100.0, 200.0$ , and 400.0, use Takacs' method to compute the amplitude and phase errors of numerical solutions relative to the exact solution (which is simply the initial condition shifted to the right by the number of time steps multiplied by the Courant number), and compare them with the theoretical predictions made in part b. Is the predominant error type similar to that anticipated from the modified equation? Comment on your findings.

Think about the following questions and make sure you know the expected answers. Read Durran (1991 MWR). You do not need to hand in answers to these questions.

Consider once again, the 1-D advection equation in the previous problem:

$$\frac{\partial u}{\partial t} + c \frac{\partial u}{\partial x} = 0$$

where  $c$  is a positive and constant advection speed.

Use a periodic domain containing 32 points with  $\Delta x = 1/32$  and an initial condition given by

$$u_0(x) = \begin{cases} \{64[(x-1/2)^2 - 1/64]\}^2 & \text{if } 3/8 \leq x \leq 5/8 \\ 0 & \text{otherwise} \end{cases}$$

Also, let  $c = 0.25$ . With these conditions, the feature being advected completes one circuit through the domain in a time of 1.0.

- Using the leapfrog time-differencing scheme and a second-order centered-in-space discretization for the advection term, run the solution to  $t = 3$  using Courant numbers of 0.7, 0.5, and 0.1. Compute the dispersion, dissipation, and diffusion errors using Tackacs' method.
- Repeat part a, this time adding the Asselin-Robert time filter with a filter coefficient of 0.1. Discuss the results.
- Repeat part a, this time using a fourth-order centered-in-space difference for the advection term, given by

$$\frac{u_i^{n+1} - u_i^{n-1}}{2\Delta t} = -c \left[ \frac{4}{3} \frac{u_{i+1}^n - u_{i-1}^n}{2\Delta x} - \frac{1}{3} \frac{u_{i+2}^n - u_{i-2}^n}{4\Delta x} \right]$$

Before running the program, perform a linear stability analysis and determine the phase and amplitude errors of this scheme relative to that in part a.

- Repeat-part c, this time using the third-order Adams-Bashforth time differencing scheme. Do not perform a stability analysis. Discuss your results and comment on the possible advantages and disadvantages of the third-order Adams-Bashforth scheme.